

Pattern Series

* Please see installation guide next page




Herringbone

Stone	Color	Finish	Dimension (mm)	UoM	kg/UoM	UoM/pallet	kg/pallet	Note
Bluestone	Blueocean	Honed	300x100x20	SQM	54	18.00	1000	WSL
Bluestone	Blueocean	Sawn	300x100x20	SQM	54	25.00	1400	WSL
Marble	Grey Apricot	Sandblasted	300x100x20	SQM	54	25.00	1400	WSL
Marble	Grey Apricot	Honed	300x75x12	SQM	32	25.00	800	WSL



Bluestone Ashlar Pattern 900 Series 20mm Thick

Color	Finish	Dimension (mm)	UoM	kg/UoM	UoM/pallet	kg/pallet	Note
Blueocean	Sawn	595x595 / 895x595 / 595x295 / 292x295x20	SQM	54	25.44	1400	Ashlar Pattern 900 series, Sold by m2
Blueocean	Honed	595x595 / 895x595 / 595x295 / 292x295x20	SQM	54	25.44	1400	Ashlar Pattern, sold by m2,WSL



Bluestone Antline French Pattern 20mm Thick

Color	Finish	Dimension (mm)	UoM	kg/UoM	UoM/pallet	kg/pallet	Note
Blueocean Antline	Sawn	600x400 / 400x400 / 400x300x20	SQM	54	25.60	1400	Antline Pattern, Sold by m2,WSL




Travertine French Pattern 12mm Thick

Color	Finish	Dimension (mm)	UoM	kg/UoM	UoM/pallet	kg/pallet	Note
Beige	Tumbled & Unfilled	610x406 / 406x406 / 406x203 / 203x203x12	SQM	32	38.66	1300	Sold by set, 0.744m2/set



Pattern Series Installation Guide

Travertine French Pattern 12mm Thick

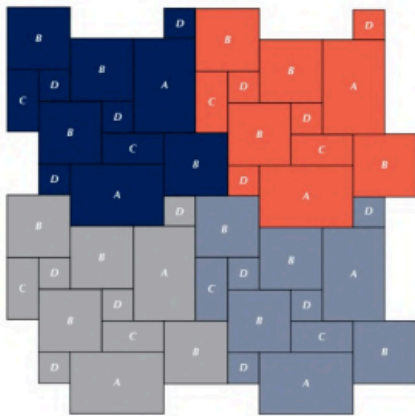


Paving Size:

- A: 610 x 406 x 12 mm 1pcs/set
- B: 406 x 406 x 12 mm 2pcs/set
- C: 406 x 203 x 12 mm 1pcs/set
- D: 203 x 203 x 12 mm 2pcs/set

0.744 SQM/set

Bluestone Antline French Pattern 20mm Thick

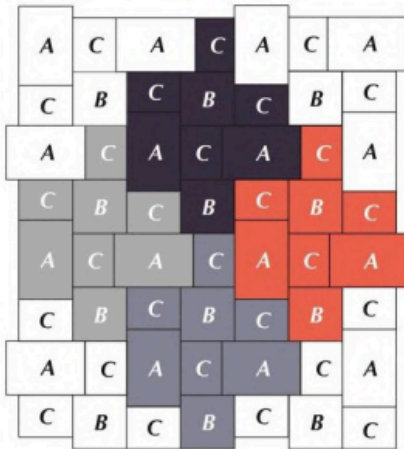


Paving Size:

- A: 600 x 400 x 20 mm 2pcs/set
- B: 400 x 400 x 20 mm 2pcs/set
- C: 400 x 300 x 20 mm 4pcs/set

1.28 SQM/set

Bluestone Ashlar Pattern 900 Series 20mm Thick

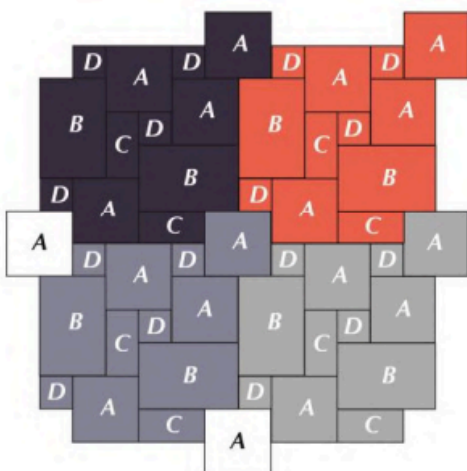

Paving Size:

- A: 595 x 595 mm 4pcs/set
- B: 895 x 595 mm 2pcs/set
- C: 595 x 295 mm 2pcs/set
- D: 295 x 295 mm 4pcs/set

3.18 SQM/set



Travertine French Pattern Installation Guide

Our Travertine French Pattern pavers are designed to create a classic appearance. Please note the following regarding grouting and installation:

Grout Line Variations:

Due to the inherent design and production of travertine, the pattern includes specific pieces (610x06mm, 406x203mm, 203x203mm, and 406x406mm) where a unified grout line is not achievable. This configuration means the short edge of the 406x203mm and one edge of the 203x203mm are equal in length to the 406x406mm, resulting in a butt joint between these pieces.

Recommended Installation Methods:

- Minimal Grout Lines:
 - For a traditional appearance, we recommend using minimal grout lines (e.g., 2mm) around the 203x203mm pieces.
 - This will result in a finished pattern with a combination of 2mm and 4mm grout lines throughout the pattern.
 - The tumbled edges of travertine naturally soften these variations, creating an intentional, rustic feature.

- Alternative: Butt Joint Installation:
 - For a seamless look, pavers can be butt jointed with no grout lines.
 - This method eliminates any size discrepancy issues and creates a smooth, continuous surface.

Important Note:

The natural variations in travertine, including tumbled edges and slight size differences, contribute to the unique charm and character of the French pattern. These characteristics should be considered as a desirable feature rather than a defect.

We recommend consulting with a professional installer experienced in travertine installation to achieve the desired look.